


IP66



- ATEX Zone 1 & 2
- Certification: ATEX - CNEX
- The body is made of carbon steel and PC cover
- Pollution level: Level 3
- Emergency light with/without **battery**
(Can be customized)

EX Marking

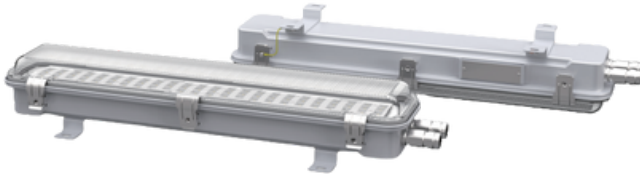




Certification






Markets



	Ex-Level	II 2G Ex db eb mb IIC T5 Gb II 2D Ex tb IIIC T95°C Db
	Ingress Protection level	IP66
specifications	Model	VT-EXLNX series
	Corrosion-proof level	WF2
	Power (W)	20W, 30W, 40W, 60W
	Voltage - Frequency	AC110-277V , 50/60 Hz
	Luminaire Efficiency	130lm/W±5
	PF	≥0.9
	CCT	3500K ~6500K
	RA	>80
	Net Weight	≈ 2.6Kg / 4.5kg
	Battery pack Type	Ni-cd LiFePO (can order with/without battery)
	Voltage and capacity (Battery)	3.6V-3.0Ah / 9.6V-3.5Ah
	Emergency power	3.5W, 7W, 10W, 15W
	Emergency time	≥90min, ≥120min, ≥180min
	Rated Lifetime	>50,000
	Operating temperature	-40°C ~ +55°C

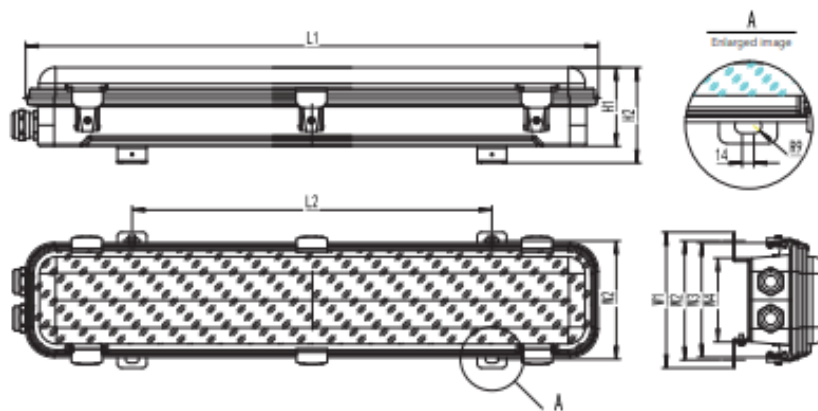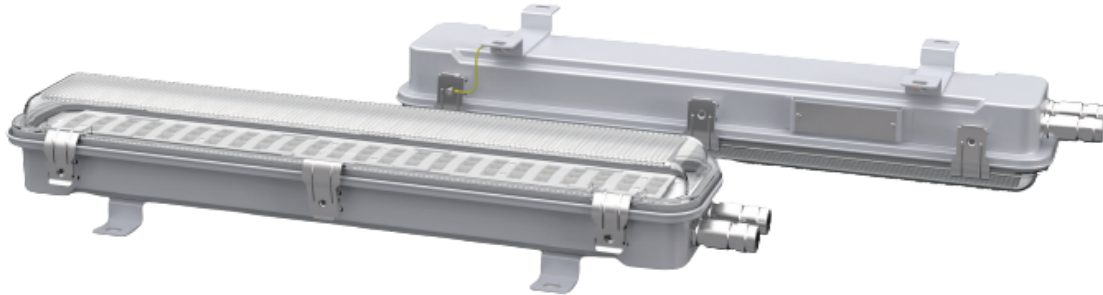

	L1	L2	W1	W2	W3	W4	H1	H2
20W/30W/40W	685	430	162	142	136	100	94	114
40W/60W	1305	970						

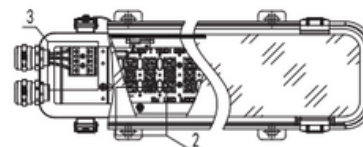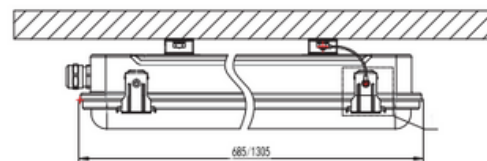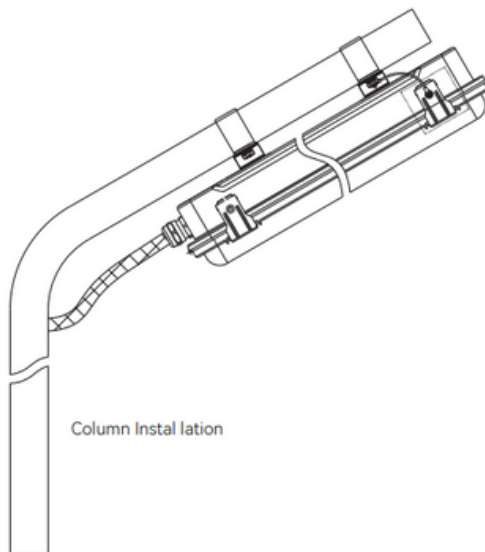

- First step: Loosen the buckle screw and open the PC lampshade
- Second step: Loosen the screws and open the light source mounting plate
- Third step: Securely connect external power cables to Ex terminal