


IP66



- Aluminum
- 2*G3/4" interface
- Slight anti-corrosion
- Explosion-proof, anti-corrosion, waterproof


EX Marking

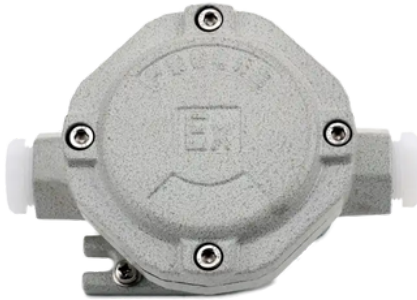


Certification



Markets

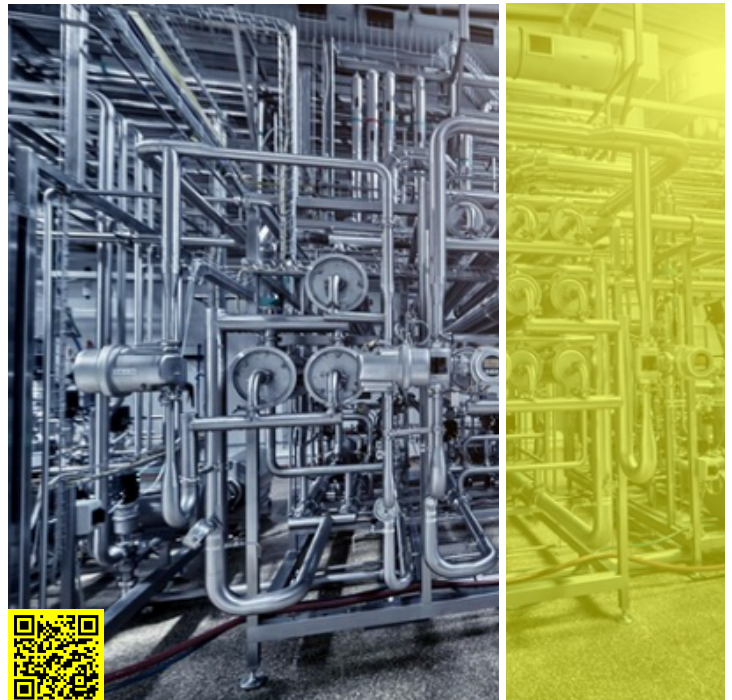

	Ex-Level	II 2G EX d IIC T6 Gb II 2D EX tb IIIC T80°C Db
	Ingress Protection level	IP66
specifications	Temperature range	-40°C~60°C
	Relative humidity	≤ 95% (+25°C)
	Atmospheric pressure	80kpa~106 kpa
	Thermostat system	Optional
	Supply voltage	DC12V/24V /AC220V
	Suitable averment	Apply to explosive gas and combustible dust environment
	Material	Aluminum
	External dimensions	100mm*62mm
	Inlet hole specifications	G3/4" X 2, have many other output for option