

IP66



- Aluminum
- 5\*G3/4" interface (Customizable)
- Slight anti-corrosion
- Explosion-proof, anti-corrosion, waterproof


## EX Marking




## Certification



## Markets

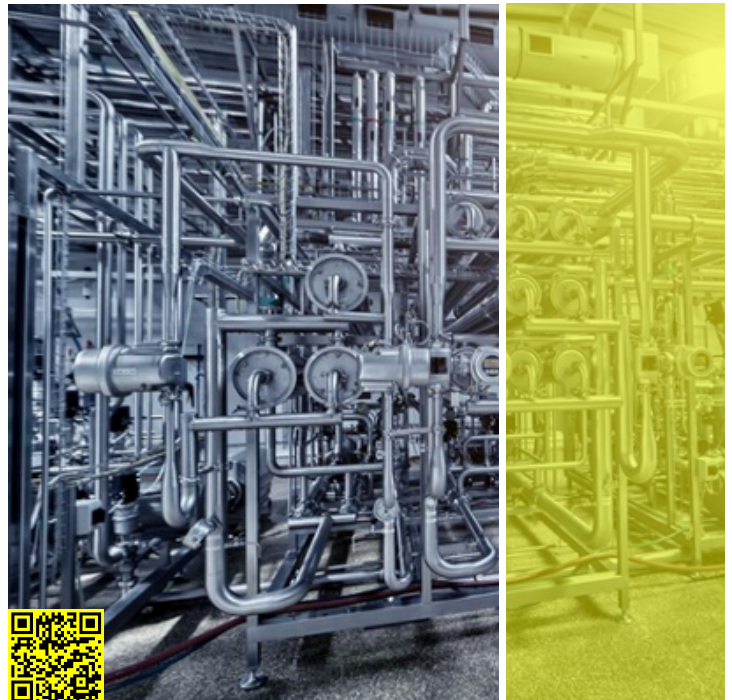

	<b>Ex-Level</b>	II 2G EX db eb IIC T6 Gb II 2D EX tb IIIC T80°C Db
	<b>Ingress Protection level</b>	IP66
<b>specifications</b>	<b>Temperature range</b>	-40°C~60°C
	<b>Relative humidity</b>	≤ 95% (+25°C)
	<b>Atmospheric pressure</b>	80kpa~106 kpa
	<b>Thermostat system</b>	Optional
	<b>Supply voltage</b>	DC12V/24V /AC220V
	<b>Suitable averment</b>	Apply to explosive gas and combustible dust environment
	<b>Material</b>	Aluminum
	<b>External dimensions</b>	100mm*62mm
	<b>Inlet hole specifications</b>	G3/4" X 5, (Customizable)