

IP66



- Atex Certified
- Stainless Steel 304
- 2*M25 Outlets (can be customized)
- Explosion-proof, waterproof, Anti-corrosion


EX Marking



Certification



Markets

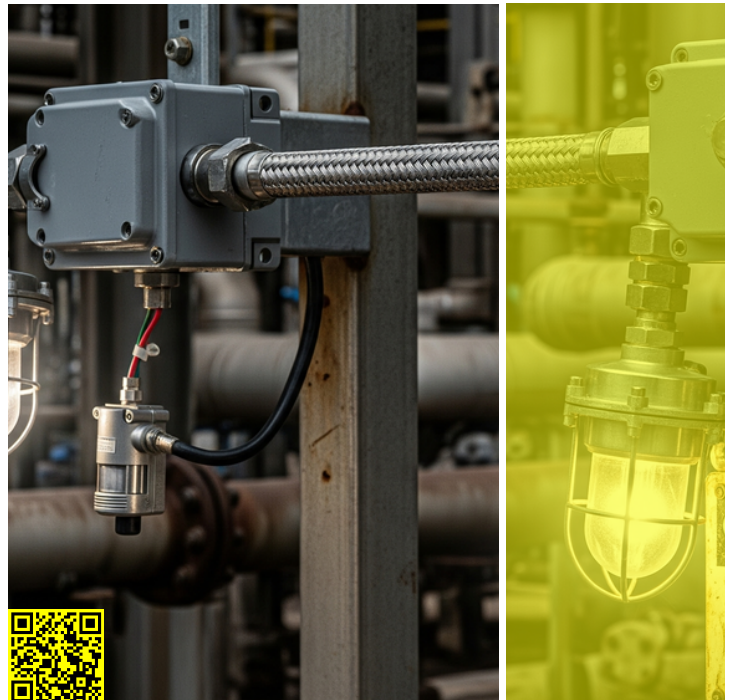

	Ex-Level	II 2G EX d IIC T6 Gb II 2D EX tb IIIC T80°C Db
	Ingress Protection level	IP66
specifications	Temperature range	-40°C~60°C
	Relative humidity	≤ 95% (+25°C)
	Atmospheric pressure	80kpa~106 kpa
	Suitable Area	Apply to explosive gas and combustible dust environment
	Material	SUS 304
	Length	2m
	Outlet specifications	M25 X 2 (can be customized)